



TA-2304-2-ISM Adjustable Sector

LANTenna Series

2400-2483 MHz




The TA-2304-2-ISM is a vertically polarized sectoral antenna which has adjustable side panels for 60-160 degree azimuth patterns. The antenna consists of a printed dipole array enclosed in an aluminum base with a UV stabilized radome for superior weatherability. It is designed for wireless data in the ISM band and is at DC ground to aid in lightning protection.

Electrical Specifications

- Frequency Range:** 2400-2483 MHz
- Gain:** 17.5 dBi @ 60°, 15.5 dBi @ 90°
14.5 dBi @ 120°, 13 dBi @ 160°
- VSWR:** 1.5:1 max.
- Front to Back Ratio:** 20 dB min.
- Polarization:** Vertical
- Power Rating:** 100 Watts
- H-Plane Beamwidth:** 60, 90, 120, 160 degrees
- E-Plane Beamwidth:** 7.2 degrees
- Cross Pol. Discrimination:** 20 dB min.
- Impedance:** 50 ohms nominal
- Termination:** N female

Typical mid band values. (For details , contact factory)
Specifications subject to change without notice

H-Plane

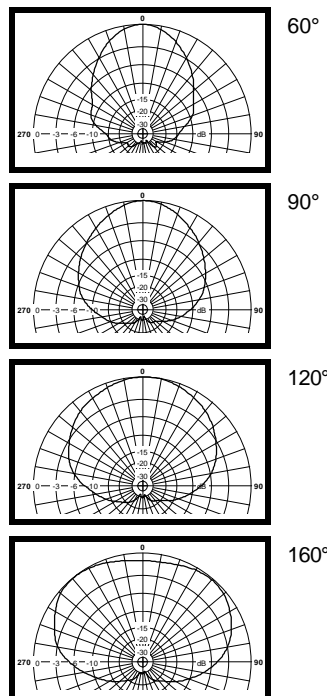


Mechanical Specifications

- Length:** 40 in. (1016 mm)
- Width:** 4.9 in. (124 mm)
- Depth:** 4.6 in. (117 mm)
- Weight (incl. Clamps):** 8 lb. (3.6 kg)
- Rated Wind Velocity:** 125 mph (200 km/h)
- Hor. Thrust at rated wind:** 86 lb. (39 kg)
- Mechanical Tilt:** 0 - 20 degrees
- Mounting (O.D.):** 0.75 - 3.0 in. (19 - 76 mm)

Materials

- Radiating Elements:** Plated copper on PCB
- Reflector:** Irridated aluminum
- Radome:** Gray UV stabilized ASA
- Clamps:** Aluminum and HDG steel

E-Plane

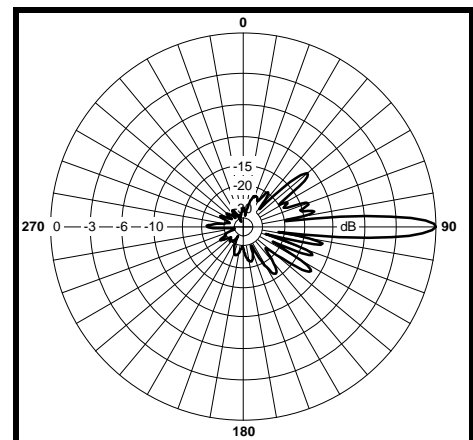



TA-2304-2-ISM Adjustable Sector

LANTenna Series

2400-2483 MHz



Rev. 1.2

2007-11-27

500 Van Buren Street
P.O. Box 550
Kemptville, ON K0G 1J0
Canada



ISO 9001:2000
CGSB Registered
Certificate 961004

T: 613-258-5928
T: 877-ANTENNA
F: 613-258-7418
www.tiltek.com