



LANTenna Series

TA-2304LM-ISM Adjustable Sector

2400-2483 MHz



The TA-2304LM-ISM is a vertically polarized sectoral antenna which has adjustable side panels for 60-160 degree azimuth patterns. The antenna consists of a printed dipole array enclosed in an aluminum base with a UV stabilized radome for superior weatherability. It is designed for wireless data in the ISM band and is at DC ground to aid in lightning protection.

Electrical Specifications

Frequency Range: 2400-2483 MHz
Gain: 15 dBi @ 60°, 13 dBi @ 90°
 12 dBi @ 120°, 10.5 dBi @ 160°
VSWR: 1.5:1 max.
Front to Back Ratio: 20 dB min.(15 dB @160°)
Polarization: Vertical
Power Rating: 100 Watts
H-Plane Beamwidth: 60, 90, 120, 160 degrees
E-Plane Beamwidth: 14.5 degrees
Cross Pol. Discrimination: 20 dB min.
Impedance: 50 ohms nominal
Termination: MCX male

Typical mid band values. (For details , contact factory)
Specifications subject to change without notice


Mechanical Specifications

Length: 20.5 in. (521 mm)
Width: 4.9 in. (124 mm)
Depth: 4.6 in. (117 mm)
Weight (incl. Clamps): 2 lb. (0.91 kg)
Rated Wind Velocity: 125 mph (200 km/h)
Hor. Thrust at rated wind: 43 lb. (19.5 kg)
Mechanical Tilt: N/A
Mounting (O.D.): N/A


Materials

Radiating Elements: Plated copper on PCB
Reflector: Irridated aluminum
Radome: Gray UV stabilized ASA
Clamps: Aluminum and HDG steel

H-Plane

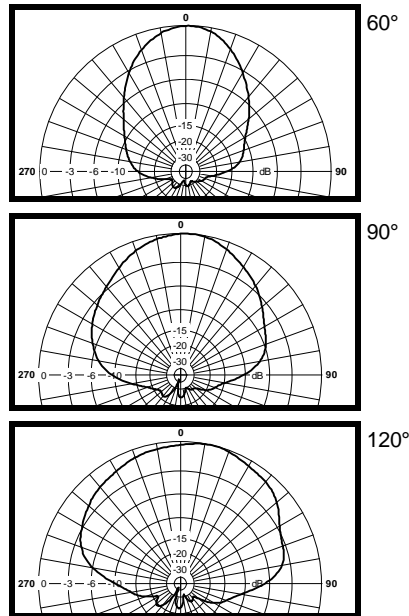


E-Plane

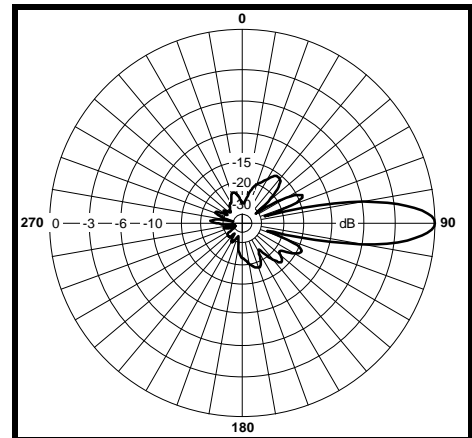



LANTenna Series
TA-2304LM-ISM Adjustable Sector
2400-2483 MHz

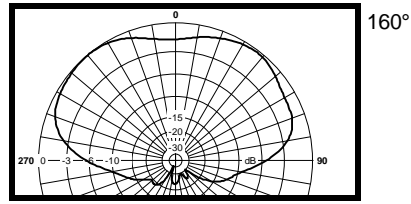

Rev. 1.0

2007-12-07

