

## TA-2304-2-180 Sector

### 2300-2500 MHz



The TA-2304-2-180 is a vertically polarized sectoral antenna with a fixed 180 degree pattern. The antenna consists of a printed dipole array enclosed in an aluminum base with a UV stabilized radome for superior weatherability. The antenna is at DC ground to aid in lightning protection.

#### Electrical Specifications

**Frequency Range:** 2300-2500 MHz  
**Gain:** 12.5 dBi  
**VSWR:** 1.5:1 max.  
**Front to Back Ratio:** 15 dB  
**Polarization:** Vertical  
**Power Rating:** 100 Watts  
**H-Plane Beamwidth:** 180 degrees  
**E-Plane Beamwidth:** 7.2 degrees  
**Electrical Downtilt:** 0, 2 degrees  
**Cross Pol. Discrimination:** 20 dB min.  
**Impedance:** 50 ohms nominal  
**Termination:** N female (7/16 DIN optional)

Typical mid band values. (For details , contact factory)  
 Specifications subject to change without notice


#### Mechanical Specifications

**Length:** 40 in. (1016 mm)  
**Width:** 4.9 in. (124 mm)  
**Depth:** 4.6 in. (117 mm)  
**Weight (incl. Clamps):** 8 lb. (3.6 kg)  
**Rated Wind Velocity:** 125 mph (200 km/h)  
**Hor. Thrust at rated wind:** 86 lb. (39 kg)  
**Mechanical Tilt:** 0 - 30 degrees (optional)  
**Mounting (O.D.):** 0.75 - 3.0 in. (19 - 76 mm)


#### Materials

**Radiating Elements:** Plated copper on PCB  
**Reflector:** Irridited aluminum  
**Radome:** Gray UV stabilized ASA  
**Clamps:** Aluminum and HDG steel


H-Plane

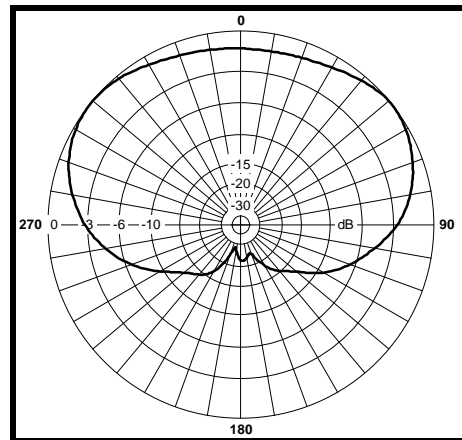

E-Plane

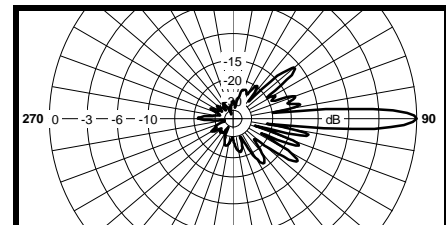

T0

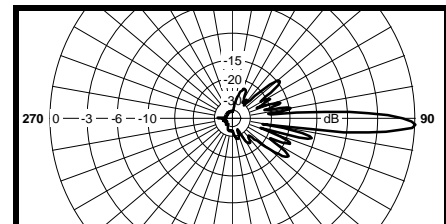

T2