


TA-2504-8-50 Sector 2500-2700 MHz

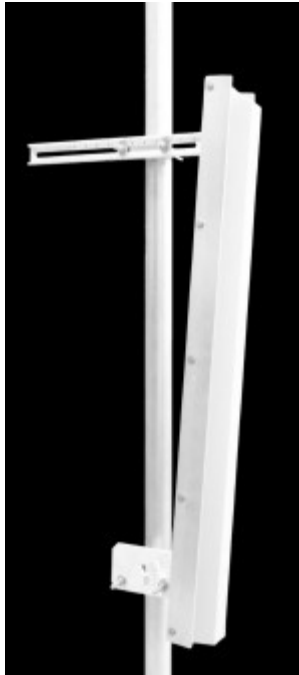

The TA-2504-8-50 is a medium-gain vertically polarized 50 degree sectoral antenna. It consists of a linear dipole array with fixed side panels to achieve the correct beamwidth. Radiating elements are protected by a weatherproof radome for operation under severe weather conditions and are at DC ground to aid in lightning protection.

Electrical Specifications

Frequency Range: 2500-2700 MHz
Gain: 17.5 +/- 1 dBi
VSWR: 1.5:1 max.
Front to Back Ratio: 25 dB min.
Polarization: Vertical
Power Rating: 50 Watts
H-Plane Beamwidth: 50° +/- 5°
E-Plane Beamwidth: 8° +/- 1°
Electrical Downtilt: 0, 2 degrees
Cross Pol. Discrimination: 15 dB (azimuth)
Impedance: 50 ohms nominal
Termination: N female (7/16 optional)

Typical mid band values. (For details , contact factory)
 Specifications subject to change without notice


Mechanical Specifications

Length: 39.4 in. (1000 mm)
Width: 5.5 in. (140 mm)
Depth: 3.75 in. (95 mm)
Weight (incl. Clamps): 9 lb. (4 kg)
Rated Wind Velocity: 125 mph (200 km/h)
Hor. Thrust at rated wind: 93 lb. (42 kg)
Mechanical Tilt: 0 - 10°, 1° increments
Mounting (O.D.): 0.75 - 3.0 in. (19 - 76 mm)


Materials

Radiating Elements: Tin-Plated copper on PCB
Reflector: Irridited aluminum
Radome: Gray UV stabilized ASA
Clamps: Aluminum, EDZ Steel (HDG Steel Opt)


H-Plane

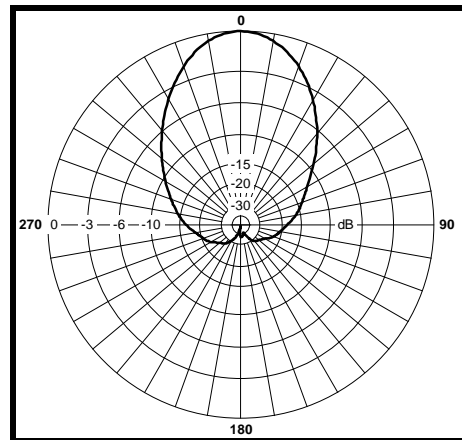

E-Plane

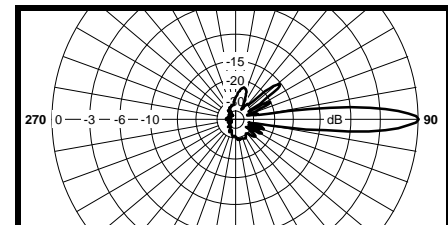

T0

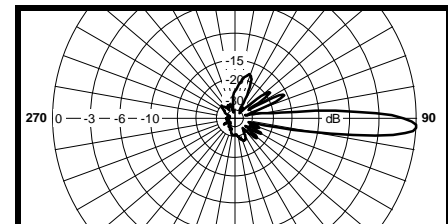

T2