

# SINGLE BAND PANEL ANTENNA BAND 700 MHz

## AT39-666TX

698 - 896

H90° V10°

Fixed Tilt 0°, 2°, 4°, 6°


### ELECTRICAL SPECIFICATIONS

#### BAND 700

Antenna Model	AT39-666TX
Polarization	± 45°
Frequency (MHz)	<b>698-896</b>
Horizontal Beamwidth	90°
Vertical Beamwidth	10°
Gain (dBi)	14.5
Vertical Electrical Tilt	FIXED 0°, 2°, 4°, 6°
Upper Sidelobe Suppression for the 1 <sup>st</sup> lobe above main beam (dB)	18
Front-to-Back Ratio @ 180° ± 20° (dB)	20
VSWR	< 1.4 : 1
Cross Polar Ratio @ ± 60° (dB) <i>Typically</i>	10
Isolation Between Ports	> 30
Maximum Power Per Input (W)	500
Intermodulation (dBc)	< - 150
Impedance (Ω)	50

### MECHANICAL SPECIFICATIONS

Connectors	2 X 7/16 Female
Connector Position	Bottom
Survival Wind Speed km/h (mph)	200 (125)
Front Windload N @ 160 km/h (lbs @100 mph)	1045 (235)
Lateral Windload N @ 160 km/h (lbs @100 mph)	205 (46)
Radome Color	Grey, paintable
Humidity	100%
Antenna Weight kg (lbs)	19 (42)
Antenna Dimension mm (in) H X W X D	1985 X 325 X 115 (78 X 13 X 5)

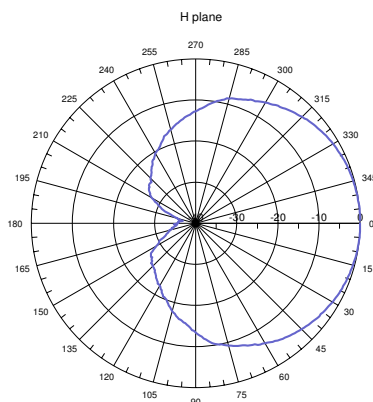

H&V Pattern

