

Low PIM Indoor 2-Way Power Splitter


698 - 2700 MHz

ELECTRICAL SPECIFICATIONS

Model No	DCI/2W/698-2K7
Frequency Range (MHz)	698 - 2700
Type	2 Way
Distribution Loss (dB)	3.0
Insertion Loss (dB)	< =0.2
VSWR	< =1.2
Power Handling (Wav)	200
Input Power per Port, maximum (W)	50
PIM, 3 rd Order 2 x 20 W (dBc)	< =-150
Impedance (Ω)	50

MECHANICAL SPECIFICATIONS

Connector Type	3 x N Female
Weight (without Mounting Kit) kg (lbs)	0.20 (0.44)
Material	Aluminum
Finish	Black / Grey
Operational Temperature C (F)	-30~+50 (-22~+122)
Operational Humidity (%)	5 - 95
Storage Temperature C (F)	-40 to +85 (-40 to +185)
Dimension	214.5 x 60.5 x \varnothing 24.5
H x W x D mm (in)	(8.45 x 2.38 x 0.96)

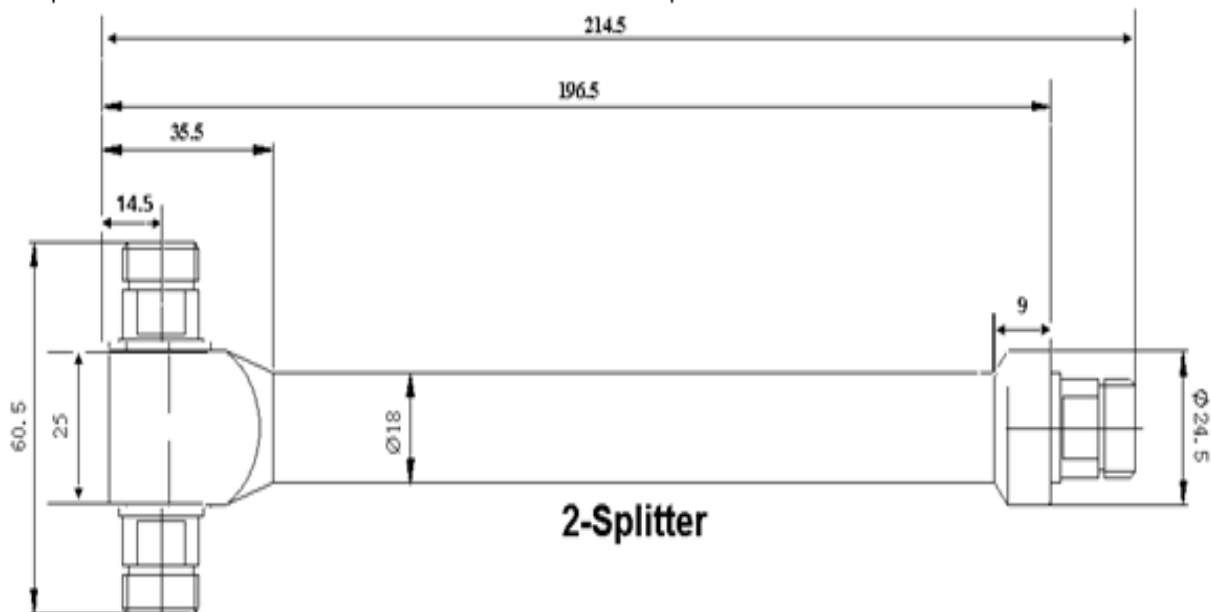

Low PIM Indoor 3-Way Power Splitter


698 - 2700 MHz

ELECTRICAL SPECIFICATIONS

Model No	DCI/3W/698-2K7
Frequency Range (MHz)	698 - 2700
Type	3 Way
Distribution Loss (dB)	4.77
Insertion Loss (dB)	< =0.3
VSWR	<=1.25
Power Handling (WAv)	200
Input Power per Port, maximum (W)	50
PIM, 3 rd Order 2 x 20 W (dBc)	< =-150
Impedance (Ω)	50

MECHANICAL SPECIFICATIONS

Connector Type	4 x N Female
Weight (without Mounting Kit) kg (lbs)	0.23 (0.50)
Material	Aluminum
Finish	Black / Grey
Operational Temperature C (F)	-30~+50 (-22~+122)
Operational Humidity (%)	5 - 95
Storage Temperature C (F)	-40 to +85 (-40 to +185)
Dimension	272 x 60.5 x \varnothing 24.5
H x W x D mm (in)	(10.70 x 2.38 x 0.96)

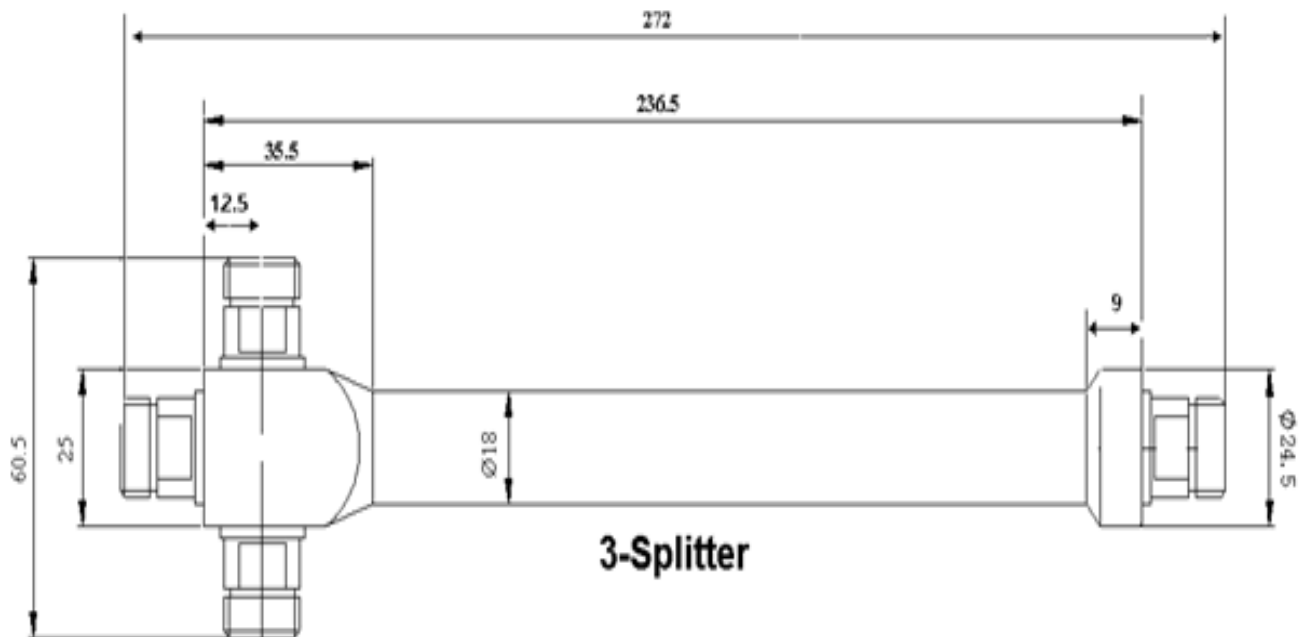

Low PIM Indoor 4-Way Power Splitter

698 - 2700 MHz

ELECTRICAL SPECIFICATIONS

Model No	DCI/4W/698-2K7
Frequency Range (MHz)	698 - 2700
Type	4 Way
Distribution Loss (dB)	6.02
Insertion Loss (dB)	< =0.3
VSWR	< =1.3
Power Handling (Wav)	200
Input Power per Port, maximum (W)	50
PIM, 3 rd Order 2 x 20 W (dBc)	< =-150
Impedance (Ω)	50

MECHANICAL SPECIFICATIONS

Connector Type	5 x N Female
Weight (without Mounting Kit) kg (lbs)	0.26 (0.57)
Material	Aluminum
Finish	Black / Grey
Operational Temperature C (F)	-30~+50 (-22~+122)
Operational Humidity (%)	5 - 95
Storage Temperature C (F)	-40 to +85 (-40 to +185)
Dimension	272 x 60.5 x \varnothing 24.5
H x W x D mm (in)	(10.70 x 2.38 x 0.96)

