


# TA-824-4-65 Dual Polarized Sector

## 824-896, 872-960 MHz

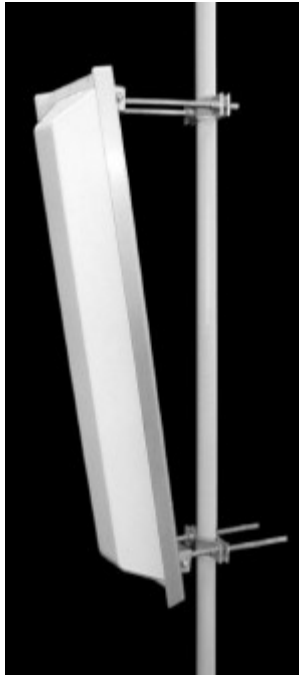

The TA-824-4-65 is a dual slant polarized 65 degree sectoral antenna. The antenna is intended for use where multiple antennas may not be practical. It consists of a broadband dipole array on an aluminum base with a UV stabilized ASA radome for superior weatherability. The antenna is at DC ground to aid in lightning protection.

### Electrical Specifications

**Frequency Range:** 824-896, 872-960 MHz  
**Gain:** 2 x 12.5 dBd co-polarized  
**VSWR:** 1.5:1 max.  
**Front to Back Ratio:** 30 dB min.  
**Polarization:** Dual slant +45 and -45  
**Power Rating:** 500 Watts  
**H-Plane Beamwidth:** 65 degrees  
**E-Plane Beamwidth:** 19 degrees  
**Electrical Downtilt:** 0°, 4°, 6°, 8°, 9°, 12°, 15°, 18°  
**Port to Port Isolation:** 30 dB  
**Impedance:** 50 ohms nominal  
**Termination:** 2 x N female (7/16 optional)

Typical mid band values. (For details, contact factory)  
 Specifications subject to change without notice


### Mechanical Specifications

**Length:** 48 in. (1220 mm)  
**Width:** 13 in. (330 mm)  
**Depth:** 8 in. (203 mm)  
**Weight (incl. Clamps):** 27 lb. (12.3 kg)  
**Rated Wind Velocity:** 125 mph (200 km/h)  
**Hor. Thrust at rated wind:** 270 lb. (123 kg)  
**Mechanical Tilt:** 0 - 15 degrees  
**Mounting (O.D.):** 1.75 - 4.0 in. (44.5 - 102 mm)

### Materials

**Radiating Elements:** Irridited aluminum  
**Reflector:** Irridited aluminum  
**Radome:** Gray UV stabilized ASA  
**Clamps:** HDG steel

Azimuth

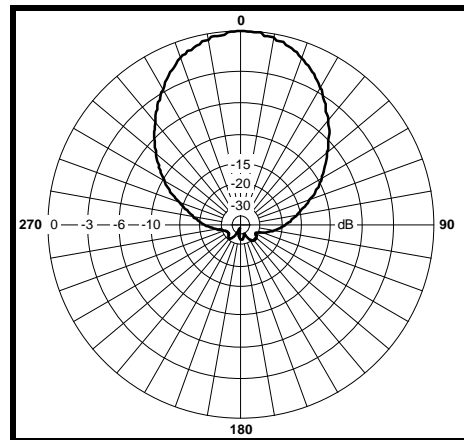

Elevation

